

**MENŞEİ VE KALİBRASYON SERTİFİKASI
(ORIGIN AND CALIBRATION CERTIFICATE)****ÜRETİCİ FİRMA BİLGİSİ (COMPANY INFORMATION)**

Ünvan / Title	PRESIZION AKARYAKIT EKİPMANLARI İMALATI SAN VE TİC LTD STİ
Merkez Ofis / Head Office	Cerkesli OSB Mah. İMES 9. Cad. No:21 İMES OSB DİLOVASI/KOCAELİ/TURKEY
İletişim / Communication	Tel : +90 262 290 92 15 e-mail : presizion@presizion.com.tr

ÜRÜN BİLGİSİ (PRODUCT INFORMATION)

MODEL (MODEL)	PS18M
AKIŞ HIZI (FLOW RATE)	75 LPM (MINIMUM) 750 LPM (MAXIMUM)
DOĞRULUK SINIFI (ACCURACY CLASS)	0,2 %
EN DÜŞÜK ÖLÇÜLEBİLİR HACİM (MINIMUM MEASURED QUANTITY)	100 LİTER
MINIMUM BASINÇ (MINIMUM PRESSURE)	1,5 BAR
MAKSİMUM BASINÇ (MAXIMUM BASINÇ)	10 BAR
MEKANİK ÇEVRESEL SINIF (MECHANICAL ENVIRONMENTAL CLASS)	M3
ELEKTROMANYETİK ÇEVRESEL SINIF (ELECTROMAGNETIC ENVIRONMENTAL CLASS)	E3

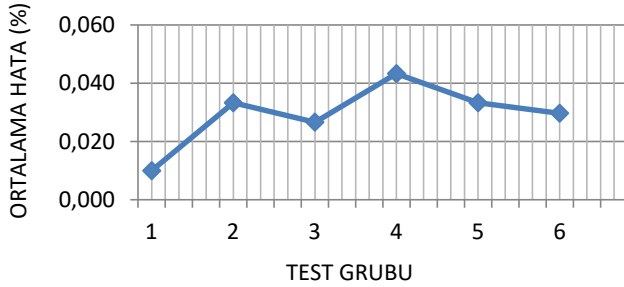
MÜŞTERİ (CUSTOMER DETAILS)

MÜŞTERİ İSMİ (CUSTOMER NAME)	AWKENT IRAQ
ADRES (ADRESS)	ERBİL / IRAQ
RAPOR NO	KP00122
İMALAT TARİHİ (PRODUCTION DATE)	2022
KALİBRASYON TARİHİ (CALIBRATION DATE)	26.09.2022
SERİ NO (SERIAL NO)	221417

MENŞEİ VE KALİBRASYON SERTİFİKASI
(ORIGIN AND CALIBRATION CERTIFICATE)**KALİBRASYON BİLGİSİ (CALIBRATION INFORMATION)**

ORTAM SICAKLIĞI (AMBIENT TEMPERATURE)	21 °C
ORTAM BASINCI (AMBIENT PRESSURE)	910 hPa
BAĞIL NEM (RELATIVE HUMIDITY)	56 %
MMQ	100 LITER

Test Grubu (Test Group)	Test No (Run No)	Akış Hızı (Flow Rate)	Test Ölçeğinin Hacmi (Volume Indication of Test Measure)	Kalibre Edilen Sayacın Hacmi (Volume Indication of Flow Meter)	Hata Payı (Rate of Error)	Ortalama Hata (Average Error)	Tekrarlanabilirlik (Repeatability)	Tolerans İçinde ? (In Tolerance ?)	Test Basıncı (Test Pressure)
		LPM	LITER	LITER	(%)	(%)			bar
1	1	680	1000,20	1000,00	-0,0200	0,010	0,0212	YES	6
	2	700	1000,00	1000,10	0,0100			YES	6
	3	750	999,80	1000,20	0,0400			YES	6
2	4	690	1001,00	1001,40	0,0399	0,033	0,0077	YES	6
	5	600	999,90	1000,30	0,0400			YES	6
	6	650	1000,80	1001,00	0,0200			YES	6
3	7	520	1000,00	999,80	-0,0200	0,027	0,0311	YES	6
	8	560	999,60	1000,00	0,0400			YES	6
	9	500	999,90	1000,50	0,0600			YES	6
4	10	440	1000,00	1001,00	0,0999	0,043	0,0648	YES	6
	11	380	1000,60	1000,10	-0,0500			YES	6
	12	480	999,50	1000,30	0,0800			YES	6
5	13	300	1000,00	1001,20	0,1199	0,033	0,0888	YES	6
	14	260	999,50	1000,50	0,1000			YES	6
	15	200	1002,00	1000,80	-0,1199			YES	6
6	16	120	1000,00	1001,20	0,1199	0,030	0,1472	YES	6
	17	190	999,90	998,00	-0,1904			YES	6
	18	90	1000,40	1002,00	0,1597			YES	6

**AKARYAKIT SAYACI ÖZELLİKLER**

(FLOW METER SPECIFICATION)

SIVI SICAKLIĞI +100°C'YE KADAR

(LIQUID TEMPERATURE UP TO +100°C)

ORTAM SICAKLIĞI -25 / +100°C

(AMBIENT TEMPERATURE -25/+100°C)

BELİRSİZLİK 0.2 % DEN DAHA İYİ OLMALI

(UNCERTAINTY MUST BE BETTER THAN 0.2 %)

**HERHANGİ BİR DEFORME VEYA SIZDIRMAZLIK
GÖRÜLMEMİŞTİR**

(NO DEFORMATION OR LEAKAGE IS OBSERVED)

THIS PRODUCT WAS SOLD BY PRESIZION TO AWKENT. YOU
CAN FIND OTHER PRODUCTS SOLD BY PRESIZION TO IRAQ
ONLY BY AWKENT CO. FROM THIS LINK :

<http://snc-awkent.presizion.com.tr>